


UPC-3005

Serial Line Splitter

Input: RS-232, RS-422, NMEA0183.

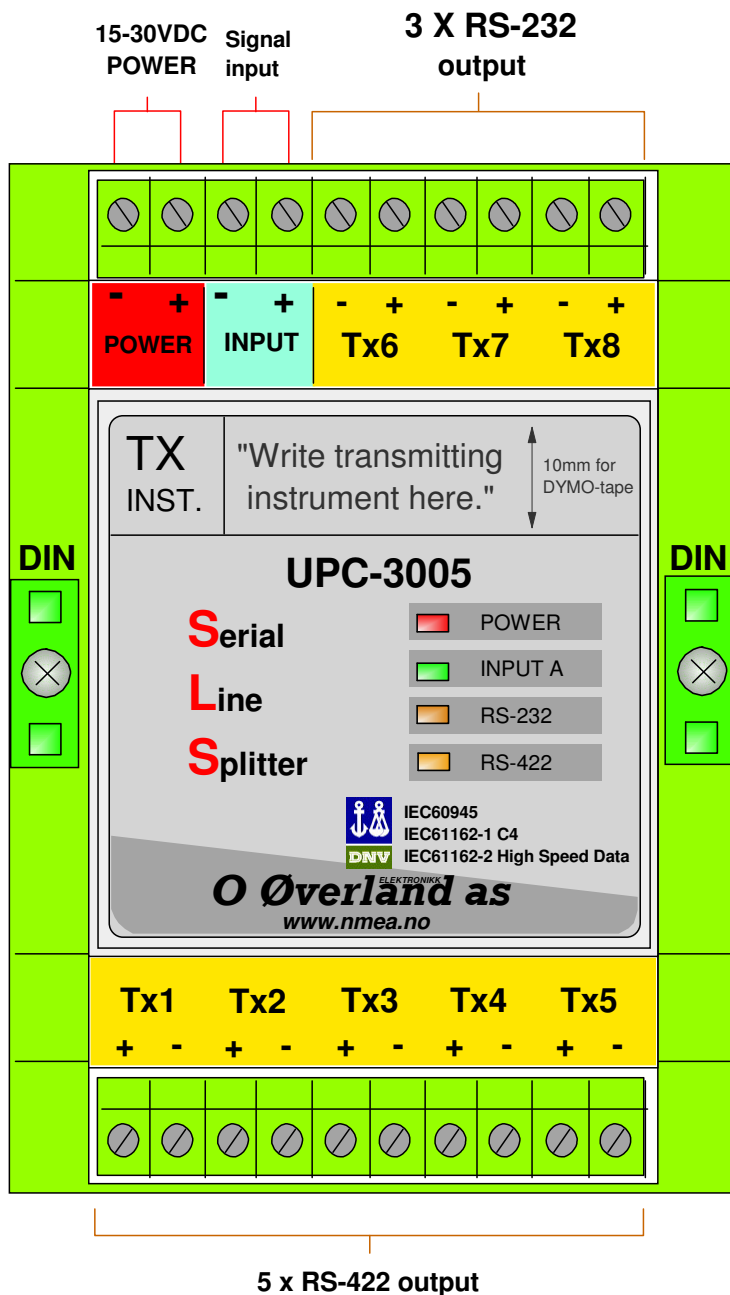

UPC3005 Spesifications:

The powersupply and input are galvanic isolated from the outputs.

Specifications:

Powersupply main: 15-30Vdc 2W

Powersupply sec: 15-30Vdc 2W

Input A 1-20V, 0,5mA min, speed 1Mbps.

Outputs: 5 off RS-422, 50mA max, 3 off RS-232.

All outputs are Short Circuit Protected

Module-box with DIN-rail mounting

Dimensions in mm: L-130 x H-50 x W-80

O.Øverland as ELECTRONICS

P.O.Box1098 N6403 MOLDE NORWAY

TEL.+47 71 20 24 00 FAX.+47 71 25 12 14

www.overland.no post@overland.no