
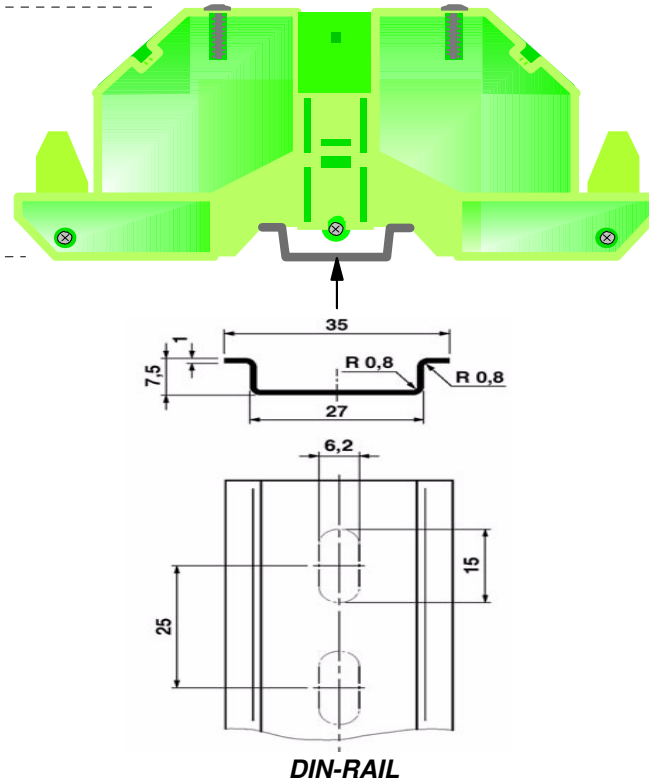


UPC-3005 SLS

Input: RS-232, RS-422, NMEA0183.

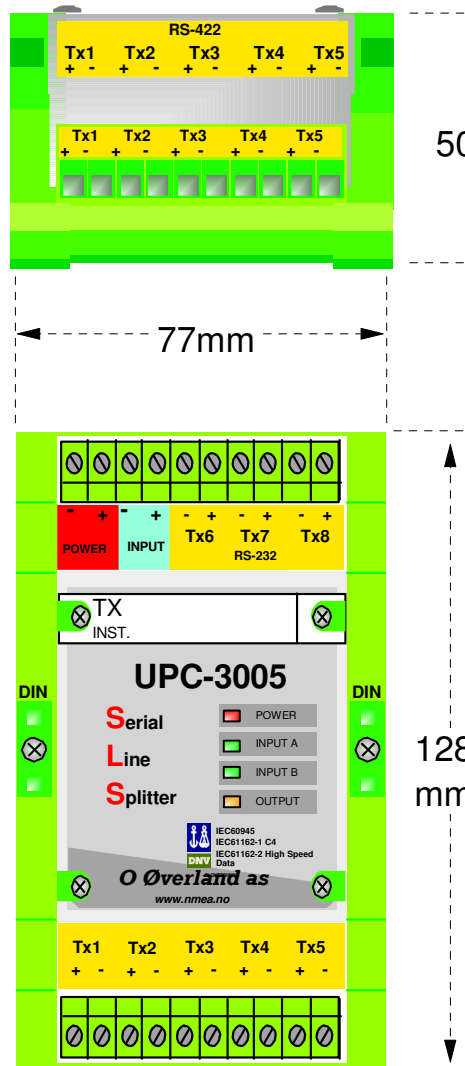

UPC3005-SLS Specifications:

The powersupply and input are galvanic isolated from the outputs.

Specifications:

Powersupply main: 15-30Vdc 2W

Powersupply sec: 15-30Vdc 2W

Input A: NMEA 0183, RS232, RS422, RS485, CURRENT LOOP

Outputs: 5 of RS-422, 50mA max, 3 of RS-232.

All outputs are Short Circuit Protected

Module-box with DIN-rail mounting

Dimensions in mm: L-77 x H-50 x W-128

O.Øverland ELECTRONICS **as**

P.O.Box1098 N6403 MOLDE NORWAY
TEL.+47 71 20 24 00 FAX.+47 71 25 12 14
www.overland.no post@overland.no